

HOW TO USE THE PRICE LABELER




1

Pull both buttons on the sides of the body of the price labeler towards the direction indicated by the arrow above.



※ Check that the bottom has opened.



2


Open the label case cover towards the direction indicated by arrow above.



3


Put the label onto the label hanger.






4


LABEL Put the label edge into the empty cavity, indicated by the arrow above. Make sure to leave 6 inches of the label sticking out.






5

Close the base cover a and turn the unit upside down.



6

Put the holes of the label into the protruded spokes.



7


Close the support cover b.




8

Squeeze the lever three times. The label comes out through the Attachment Roller.

HOW TO REPLACE THE INK ROLLER






※ Be careful not to touch the ink.




1

Press and tip open the ↑ part to open the ink roller cover.




2

Remove the handle, take out the old ink roller and replace it with a new one.



To remove and replace the ink roller, spread open the ink roller hanger

HOW TO ADJUST LETTERS

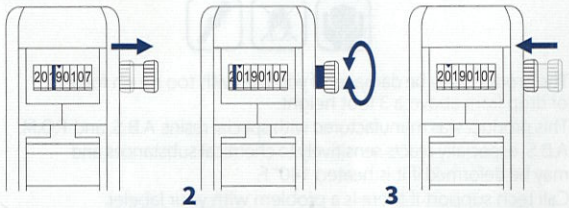


1 **2** **3**

1 Pull the dial shaft outward to adjust the digit.
2 You can set the currency unit, numbers and letters by turning the dial back and forth.
3 When you are finished, push the shaft to the left until it stops.


- You can now print only black characters on a white background.
- A Yellow & black background indicates blank space.

HOW TO ADJUST PRINTING POSITION

To adjust, loosen one of the screws on each side of the Print Head. When finished fixing the position of the Print Head, tighten the screws.

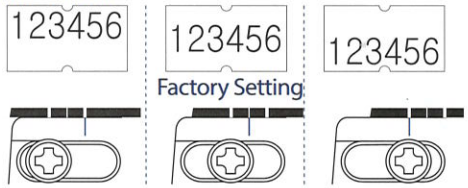

Factory setting of print head is fully centered. Only adjust print head position if you need extra space at top or bottom of label.

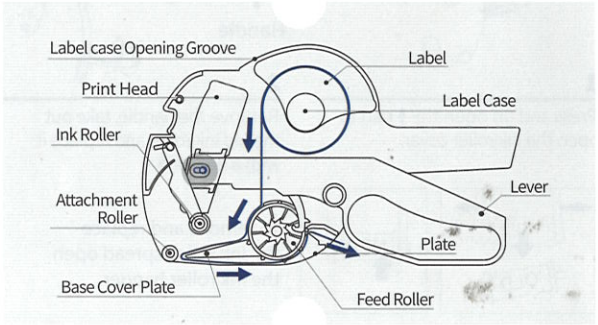

⚠ CAUTION




- The product may be damaged if you use with too much force, or drop from above a 3 foot height.
- This product was manufactured with special resins A.B.S. and P.O.M. A.B.S. especially reacts sensitively to chemical substances and may be deformed if it is heated 140° F.
- Call tech support if there is a problem with your labeler. Attempts to dismantle will void warranty unless done under instruction from Kenco tech support.
- For best results, use genuine Kenco® brand label stock. Kenco® has a price-match guarantee. Don't buy generic labels – buy Kenco® brand at unbeatable prices.
- Please do not attempt to re-ink the ink roller. This will damage the bands and void your warranty.

KENCO®
Kenco Label & Tag Co., LLC

Kenco Label & Tag Co., LLC
6543 N. Sidney Pl., Milwaukee, WI 53209
www.KencoLabel.com

ISO 9001: 2000/Cert No. 3142
ISO 14001: 2004/Cert No. 3282

KENCO®
Kenco Label & Tag Co., LLC

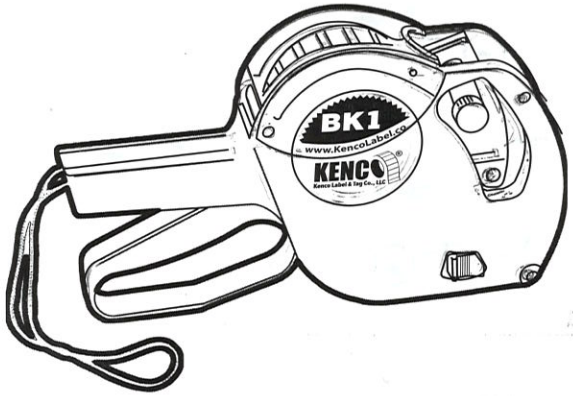

BK1

MARKING & DATE LABELER

22x12(mm)